

5 Technical data

5.1 Twin pump unit

Maximum operating pressure:	250 bar
Operating temperature:	-20...+70°C
Supply voltage:	12 or 24 Vdc
Rating pump motor with valve (nominal at 20°C):	72W
Control unit absorption:	40mA (12/24 Vdc)
Advised fusing:	10A (24 Vdc) 20A (12 Vdc)
Capacity grease reservoir:	2, 3, 4, 6 or 8 litres
Nominal grease output:	12 cm ³ / min
Grease follower plate:	standard
Minimum level switch:	standard
Pump material:	hard anodised aluminium - nylon reinforced
Protection class:	IP67

The Twin automatic greasing system complies to the electromagnetic compatibility requirements of:

Automotive directive 72/245/EC, as last amended by directive 2006/28/EC
Earth Moving Machinery standard; ISO 13766 (1999)

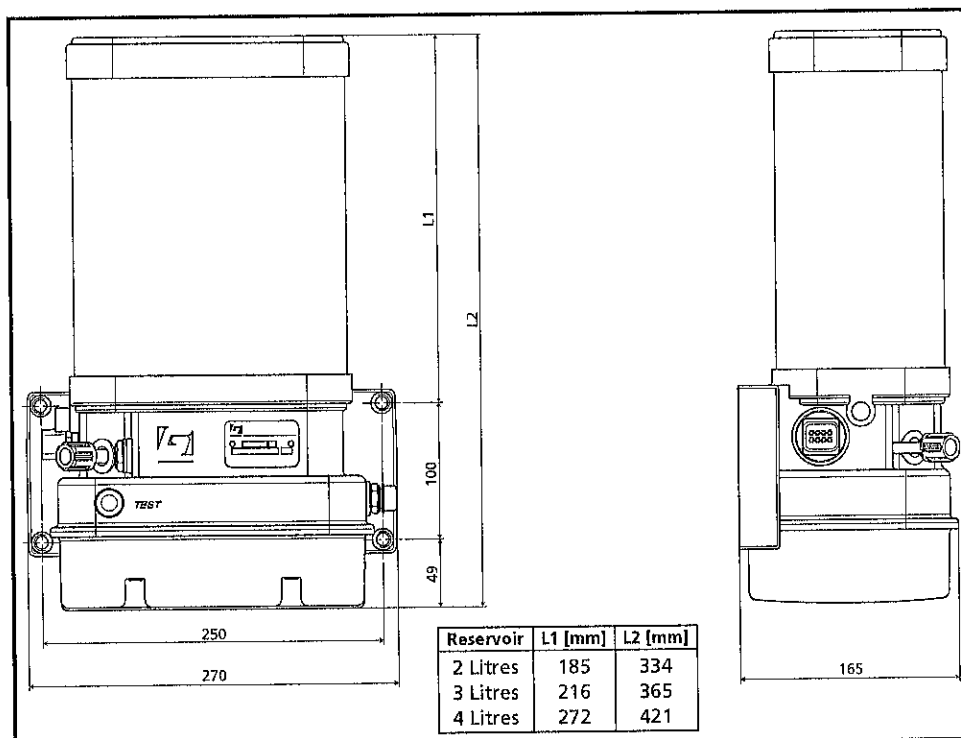


Figure 5.1 Dimensions Twin pump with a 2, 3 or 4 litre reservoir